

8 Video / Audio Distribution Amplifier

CONFORMANCE TEST REPORT

FOR **EN 55013 / EN 55020**

CE Report Number : ET93S-06-168-1

FOR **FCC 47 CFR / Part 15 Subpart B**

FC Report Number : ET93S-06-168-02

FOR **VCCI**

VCCI Report Number : ET93S-06-168-03

Model Number : SB-3750

Comment Number :

SB-3737, SB-3733, SB-3716, SB-3730
SB-3714, SB-3710, SB-3708, SB-3709
SB-3706, SB-3705, SB-3704

Input : Composite Video/Stereo Audio (RCA connector)

Output : 8 x Composite Video/Stereo Audio (RCA connector)

Power Input : DC +12V , 500mA ~ 1000mA.

Safety Notice!

To prevent damage to your television equipment use only the supplied AC Adaptor and make the power connections to your television.

Instruction Manual

Shinybow®

8 AV Distribution Amplifiers

1 input To 8 outputs

Composite Video / Stereo Audio

Earmount



Model : SB-3708M

Rockmount



Model : SB-3708MRM

1x8 AV D-Amp.

1x8 Composite Video / Stereo Audio Distribution Amplifier

Thank you for purchasing the SB-3708M/SB-3708MRM Composite Video 8 Way Splitter. You will find this unit easy to install and highly reliable but it is essential that you read this manual thoroughly before attempting to use amplifier.

Part No. : SB-3708M-0102

Introduction

Congratulations on your purchase of one of the most innovative Composite /Stereo Audio signal distribution products on the market today. For S-Video /Stereo Audio(R/L), please choose the SB-3709M/SB-3709MRM. This product provide multiple composite video and stereo audio outputs that are identical to the source signals. There is useful for distributing signals from VCRs, Camcorders, Video Game Consoles, Video CDs, DVDs, Satellite Receivers, CATV Set Top Boxes, etc.

Supplied Accessories

Check that you have the following components in your converter pack ;

- (1) 1 Instruction Manual
- (2) 1 SB-3708M/SB-3708MRM Distribution Amplifier console
- (3) 1 AC Adaptor : 12VDC, 500mA ~ 1000mA 

Before you make any connections

Make sure all Video devices to be connected to the AV DA are functioning according to their respective operation manuals before connecting them. Always connect the Composite Video/Audio devices to the AV Distribution Amplifier one at a time and make sure each works just as it did before it was connected.

Safeguards and Precautions

- a . Keep this unit away from fire, extremely hot areas, water or moisture of any Kind.
- b . Do not place this unit on any support that is not firm, level and strong.
- c . Do not service the unit yourself. Opening the unit's housing will void the warranty.
- d . Servicing must be by Shinybow or by an authorized technician.
- e - Illegal duplication of copyrighted material is strictly prohibited by Federal Laws.

Specifications

Model Number	SB-3708M / SB-3708MRM
Video Inputs	Composite Video, 75Ω on RCA Connectors
Audio Inputs	Stereo R/L, -20db 47KΩ , on RCA Connectors
Video Outputs	8 x Composite Video, 75Ω on RCA Connectors.
Audio Outputs	8 x Stereo R/L, -20db 47KΩ , on RCA Connectors
Video Bandwidth	>50MHz
Video Distortion	<1.2db (+/- 3db)
Audio Distortion	<0.6db (+/- 3db)
Channel Isolation	>50db
S/N Ratio	>50db
Power Consumed	500mA
Power Source	12 Volts DC

Typical Hookup and Operation

Front View


Model : SB-3708M



Model : SB-3708MRM




Rear View

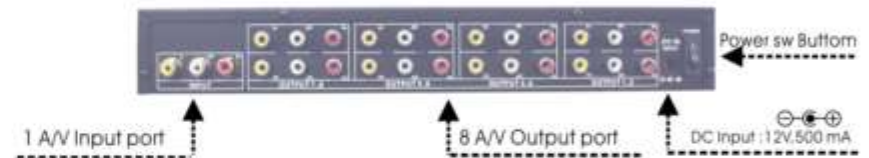

8 AV DISTRIBUTION AMPLIFIER

AV System : Composite Video, Stereo Audio

APPLICATION :
 1. VCR
 2. VIDEO CD
 3. DVD PLAYER

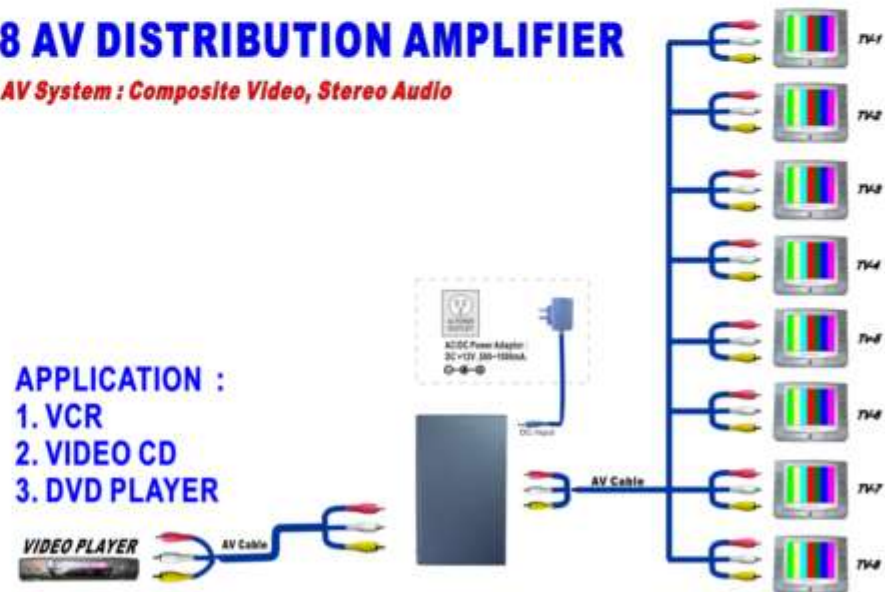

**Congratulations! The switcher is now ready for use.
 Switch on your player and TV and enjoy high quality amplifier**