

## LED-DLW-Non-Dimmable

### Ultra Slim LED Downlight Fittings

Item ref: 521.400UK, 521.403UK, 521.406UK, 521.409UK, 521.412UK, 521.415UK, 521.418UK, 521.421UK, 521.424UK, 521.427UK, 521.430UK, 521.433UK

User Manual

- The fittings are manufactured to be round and slim to make installations straightforward when space is limited.
- Three different colour options (Warm White, Natural White and Cool White)
- Available in four sizes (110MM, 160MM, 210MM and 225MM)
- TP (b) Rated
- IP54 Rated
- Beam Angle- 110°
- Lamp life- >30,000 hours
- Colour rendering index- 80
- White finish



Model Number	Product Code	Actual Size	Cut-out Size	Wattage	Colour Temperature	Lumens
LED-DLW110-6WW	521.400UK	Φ120x20mm	Φ110mm	6W	3000K	410
LED-DLW110-6NW	521.403UK	Φ120x20mm	Φ110mm	6W	4000K	430
LED-DLW110-6CW	521.406UK	Φ120x20mm	Φ110mm	6W	6000K	450
LED-DLW160-12WW	521.409UK	Φ170x20mm	Φ160mm	12W	3000K	820
LED-DLW160-12NW	521.412UK	Φ170x20mm	Φ160mm	12W	4000K	850
LED-DLW160-12CW	521.415UK	Φ170x20mm	Φ160mm	12W	6000K	880
LED-DLW210-18WW	521.418UK	Φ225x20mm	Φ210mm	18W	3000K	1240
LED-DLW210-18NW	521.421UK	Φ225x20mm	Φ210mm	18W	4000K	1320
LED-DLW210-18CW	521.424UK	Φ225x20mm	Φ210mm	18W	6000K	1400
LED-DLW225-24WW	521.427UK	Φ240x20mm	Φ225mm	24W	3000K	1840
LED-DLW225-24NW	521.430UK	Φ240x20mm	Φ225mm	24W	4000K	1940
LED-DLW225-24CW	521.433UK	Φ240x20mm	Φ225mm	24W	6000K	2040

User Manual

The Primalux (LED-DLW's) are available in three colour temperatures for each size of model and can be installed into suspended ceilings to create a flush profile luminaire. The intention is to deliver a wide dispersion of light with minimal glare.




The operating Temperature of this slim downlight is between -20°C and +40°C however this unit is for indoor use only so therefore the downlight should not be placed in such extreme situations.


Before connecting the downlight, please ensure that the mains is isolated. The power circuit is double-insulated and does not require an earth connection, so this means that the centre terminal is not used. The connections that are used on this fitting are Live and Neutral wires (brown and blue)

Please ensure that any installation and maintenance work must be completed by a qualified electrician.


### Product Installation Instructions:

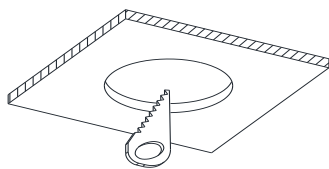


Cut the hole

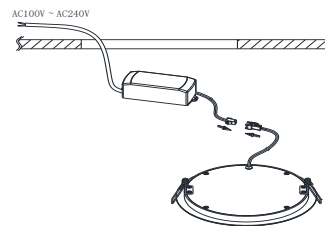

Connect the fitting to the driver

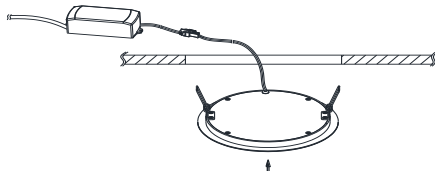

Install the fitting in the ceiling



Installation complete



**Disposal:** The "Crossed Wheelie Bin" symbol on the product means that the product is classed as Electrical or Electronic equipment and should not be disposed with other household or commercial waste at the end of its useful life. The goods must be disposed of according to your local council guidelines.

*Errors and omissions excepted.  
Copyright© 2019. AVSL Group Ltd.*

User Manual