


TLF25

25W LED Track Light

Item ref: 156.191UK, 156.192UK
156.195UK, 156.196UK

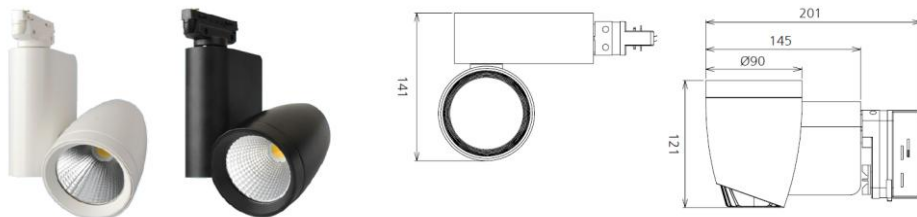

Fluxia TLF25 track lights are designed to be fitted into Fluxia single circuit, 2-wire 'H' track. With the circuit switched off, a lever at one end of the connection base can be switched across to retract the contacts, allowing the TLF25 to be inserted into the track.

When seated correctly into the track, the lever should be switched back to engage the contacts with the track and lock the TLF25 in place. If necessary, the lever can be released again to reposition the TLF25 along the track. Beam direction can be adjusted by rotating the driver housing and/or tilting the LED head. An edge rotary switch on the side of the base switches power on/off to the head.

Model	TLF25W-45N	TLF25W-45C	TLF25B-45N	TLF25B-45C
Housing colour	White	White	Black	Black
CCT	4000K	6000K	4000K	6000K
Power supply	200-240Vac, 50Hz			
Power factor (230V, 50Hz)	≥0.9			
Power consumption	25W			
Luminous flux	1800lm			
Luminous efficacy	72lm/W			
LED type	COB			
Dimming control	Non-dimmable			
Beam angle	45°			
IP rating	IP20			
Colour rendering index (CRI, Ra)	≥80			
LED lifespan	40,000 hours			
Switching cycles	15,000			
Warm up time	Instant full light			
Operating temperature range	-20°C to +45°C			
Operating humidity range	0 - 90%			
Dimensions	201 x 141 x 121mm			
Weight	1.17kg			



Disposal: The "Crossed Wheelie Bin" symbol on the product means that the product is classed as Electrical or Electronic equipment and should not be disposed with other household or commercial waste at the end of its useful life. The goods must be disposed of according to your local council guidelines.

*Errors and omissions excepted.
Copyright© 2016. AVSL Group Ltd.*